

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D21H 17/29, 21/14	A1	(11) International Publication Number: WO 00/03090 (43) International Publication Date: 20 January 2000 (20.01.00)
(21) International Application Number: PCT/FI99/00601 (22) International Filing Date: 7 July 1999 (07.07.99) (30) Priority Data: 981586 10 July 1998 (10.07.98) FI 990227 5 February 1999 (05.02.99) FI (71) Applicant (for all designated States except US): RAISIO CHEMICALS OY [FI/FI]; Raisionkaari 60, FIN-21200 Raisio (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): VIHervaara, Tapio [FI/FI]; Rakuunatie 59 A 6, FIN-20720 Turku (FI). LUUKKONEN, Kari [FI/FI]; Tenavakatu 18 A, FIN-21200 Raisio (FI). NIINIVAARA, Veikko [FI/FI]; Lumparlankatu 13 C 18, FIN-21200 Raisio (FI). (74) Agent: OY JALO ANT-WUORINEN AB; Iso Roobertinkatu 4-6 A, FIN-00120 Helsinki (FI).	(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i> <i>In English translation (filed in Finnish)</i>	
(54) Title: ADDITIVE FOR PAPER MAKING (57) Abstract The object of the invention is an additive for paper making by means of which the dusting tendency of paper can be reduced. The agent is based on starch, the molecular size of which has been reduced, and which has been cationized to a charge of less than 1.5 mEqv/g with a quaternary nitrogen compound. The agent is added to the fiber pulp for paper making prior to web formation.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			IR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Additive for paper making

The present invention concerns an additive for paper making, which is added to the fiber pulp prior to the web formation step in a paper making process. By means of the additive it is possible to impart to the paper *i.a.* a reduced tendency for dusting. In addition, the additive has been shown to facilitate water removal in the web formation stage, to improve filler retention and affect advantageously the removal of harmful substances, which have accumulated in the water circulation system of the paper machine. The additive also increases the strength of the finished paper, both dry strength and wet strength. By using the additive for paper making according to the invention improvements have been seen also in the printability of the paper, *i.a.* as regards its applicability for ink-jet printing.

A problem that is encountered in finished paper is its high tendency for dust formation, the reason for which are fiber particles and filler particles released from the paper surface. The dust gives rise to problems already at the drying stage in paper making, but above all in the machines and equipments handling paper, such as in printing equipment. The printing methods as such are developed which means high machine speeds and long printing series. High speeds aggravate dust formation, and long printing series reduce standing times, during which it would be possible to carry out a cleaning of the equipments.

In order to solve the dusting problem it is known to use methods, which as a rule are based on chemical compounds to be added to the fiber pulp, prior to the paper web formation. The use of mineral and micro waxes, of sizing agents, such as AKD and ASA dispersions, of wet strength resins and of pulp sizing starch is known. Irrespective of these known measures, paper dusting is still a significant problem.

Now it has surprisingly been discovered that *i.a.* the dusting of paper can be reduced significantly by means of the additive according to the invention to be added to the fiber pulp prior to web formation.

The additive is based on starch, which has been modified to be applicable in the invention by reducing its molecular size and reacted with an appropriate nitrogen compound in order to provide a suitable cationic charge level to the starch.

5 The reduction of the molecular size has been carried out advantageously by oxidizing, such as by peroxide oxidation. The reduction of the molecular size is appropriately carried out so that the viscosity of a 5% starch suspension at 60 °C is in the range 10 - 400 mPas (Brookfield), preferably 100 - 400 mPas, and especially advantageously in the range 100 - 200 mPas. This is achieved for example using a
10 hydrogen peroxide dose of approximately 0.02 - 0.3% from the starch dry matter in slightly alkaline reaction conditions. The desired degree of degradation is also bound to the desired cationic charge of the end product, since an increase in the cationic charge decreases the viscosity of the end product. There is also interdependence between the molecular size and the cationic charge which affects the behaviour of
15 the starch in the paper machine.

Starch which has been processed to have the desired viscosity level is thereafter processed with a quaternary nitrogen compound according to the invention so that its cationic charge level will be in the range < 1.5 , preferably in the range 0.36 -
20 1.46, especially advantageously in the range 0.72 - 1.10 mEkv/g, whereby the nitrogen contents when using the quaternary cationizing chemical, will be in the range 0.5 - 2.5, correspondingly 1.0 - 1.5%. The product is advantageously prepared using solution cationization, in which the starch is fed into the cationization process in granular form, the process conditions are chosen so that the starch dissolves
25 completely during the process. Essential process quantities in this respect are the concentration of the starch to be cationized, suitable alkalinity and increased temperature. The alkali dose (NaOH) is suitably in the range of approximately 1.5-3% of the starch dry matter, and the temperature suitably in the range of approximately 60 - 80 °C. The dry matter content of the reaction mixture should advantageously be
30 over 50%, which gives *i.a.* a good yield for the end product. A suitable quaternary cationizing chemical is 2,3-epoxypropyltrimethylammonium chloride, which should be used in an amount of approximately 10 - 40% of the amount of starch.

The operability of the invention is illustrated with the following examples, in which *i.a.* paper properties, which have an effect on the dusting of the paper in different paper handling conditions, have been monitored. Measuring the dusting tendency from a paper is as such problematic without a prolonged run of the paper in an application process, such as a printing operation. It is, however, generally known that the tendency for dust formation correlates to strength parameters which can be measured from the paper, such as Dennison, IGT and Scott Bond.

Example 1

In this example the test was carried out under full-scale practical printing conditions using a paper fabricated on newspaper machine. On the newspaper machine which had a capacity of 700 tons/24 hours a paper was made from a pulp of pressure groundwood and thermomechanical pulp. Before web formation, a starch based chemical according to the invention was mixed to the pulp in the pulp mixer on the suction side of the pump in a dosis of 1.5 - 2.5 kg/ton. Paper made in this way was then printed in a printing house, whereby it could be established that the time between cleaning of the printing rollers increased from 80000 copies to 350000 copies. The used additive had been manufactured so that to starch which had been oxidatively degraded to a usable viscosity level (100 - 200 mPas, 5%, 60 °C, Brookfield), had been cationized with 2,3-epoxypropyltrimethylammonium chloride using this cationizing chemical in an amount of 25% of the starch dry matter. The nitrogen content of the starch was 1.5% (charge 1.07 mEkv/g). From the paper also the Scott Bond value which indicates the interlaminar strength (bonding strength) was measured as one characteristic. These values have been given as a function of the additive dose in the appended figure 1. When comparing to dust measurements carried out it could be established that the Scott Bond value of the paper clearly correlated to the dusting and printability properties.

Example 2

A test series was carried out on a newspaper machine having a capacity of appr. 800 tons/24 hours. The composition of the pulp used for the paper was 50/50
 5 TMP/DIP (thermomechanical/deinked). The test run lasted for 24 hours, during which time the change in strength values was monitored for different amounts of additives. The used additive had been manufactured so that the starch which had been oxidatively degraded to a viscosity level of approximately 200 mPas (5%,
 60 °C, Brookfield) was cationized with 2,3-epoxypropyltrimethylammonium chloride
 10 using this cationizing chemical in an amount of 15% of the amount of starch. The nitrogen content of the starch was 1.0% (charge 0.72 mEkv/g).

The results are given in the following table I.

	Additive dose, kg/t	Scott Bond J/m ²	Dennison	IGT m/s	Burst kPam ² /g
15	1. 0	198.6	7.0	1.36	1.38
	2. 0	190.6	7.0	1.30	1.45
	3. 1	195.4	8.0	1.77	1.47
20	4. 1.4	205.9	7.0	1.95	1.42
	5. 1.8	194.0	9.0	1.33	1.51
	6. 1.4	297.6	9.0	1.26	1.44
	7. 3	238.3	9.5	1.53	1.47
	8. 3	304.3	10.0	1.56	1.41
25	9. 3	299.9	9.5	1.57	1.52
	10. 3	213.5	9.0	1.22	1.50
	11. 3	227.4	9.0	1.50	1.48
	12. 3	225.6	9.0	1.59	1.48
	13. 3	207.6	9.0	1.60	1.56
30	14. 3	241.1	9.0	1.49	1.52
	15. 3.5	280.1	9.0	1.57	1.49
	16. 4	260.6	9.0	1.36	1.53
	17. 0	246.9	8.0	1.26	1.42
	18. 0	212.8	8.0	1.18	1.41

35

From the results it can be seen that it is possible to affect the strength properties which in turn affect the dusting properties of the paper by means of the product according to the invention.

Example 3

A test run lasting for 2 weeks was carried out on a newspaper machine which had a capacity of 400 tons/24 hours. For the paper raw material, peroxide bleached pressure groundwood was used. To the pulp conventional pulp starch was added in an amount of 10 - 13 kg/ton for the whole test run. The test run included a period of 12 days (test days 3 - 14), during which time an additive according to the invention was added to the pulp prior to web formation in an amount of 2.5 kg/ton in addition to the conventional pulp starch, the additive having been in a manner similar to the additive of example 1. From the paper, printing series of each 4000 sheets from a paper sample taken each day was run in a test printer, from which printing series the dust amount was measured. The test results have been presented as a bar diagram in the appended figure 2. The results show a clear decrease in the amount of dust irrespective of the fact that a conventional internal size was present in the paper manufacture, which for its part should participate in reducing dusting.

Example 4

A test run was carried out on a newspaper machine by running newsprint (30-40 g/m²) the fiber base of which was pressure groundwood, thermomechanical pulp, chemical pulp and deinked pulp. The machine was operated at an acid pH-range. A bentonite/PAM microparticle retention system was used as the retention system. An additive according to the example 1 was fed 1.0 k/t to the mixing container on the suction side of the pump.

25

The behaviour of the finished paper was monitored on-line with a dust measuring device (MB Linting Dusting Tester). The results are given in the appended figure 3. It could be seen that the dusting had decreased 50-60% (test points 7-12) as compared to a corresponding paper without the additive according to the invention (test points 1-6).

30

Differences could be seen also in the operation of the paper machine as compared to manufacturing a corresponding paper without the additive according to the invention. *I.a.* water drainage improved, which manifested itself as a reduction in the steam requirement in the drying section. Also an advantageous affect as regards retention could be seen which resulted in a decrease of approximately 50% in the retention aid (PAM, polyacrylmide). -

Claims

1. Additive for paper making to be added to the fiber pulp prior to web formation, which additive has been made from starch which to its molecular weight has been
5 thinned to a viscosity level of 10 - 500, preferably 100 - 200 mPas (5%, 60 °C, Brookfield), and cationized using a quaternary nitrogen compound, characterized in that the cationization is carried out to a charge level of less than 1.5 mEkv/g.
2. The additive according to claim 1, characterized in that the cationization has
10 been carried out to a charge level of 0.36 - 1.46 mEkv/g.
3. The additive according to claim 1, characterized in that in that the cationization has been carried out to a charge level of 0.72 - 1.10 mEkv/g (1-1.54 % N).
- 15 4. The additive according to any one of the preceding claims 1-3, characterized in that the cationization has been carried out as a solution cationization so that the dry matter content of the reaction mixture is over 50%.
5. The additive according to any one of the preceding claims 1-4, characterized in
20 that the thinning of the starch has been carried out by oxidation, preferably by peroxide oxidation.
6. Method for decreasing the dusting of paper by adding to the fiber pulp fed to web formation a compound which reduces the dusting tendency of the paper,
25 characterized in that as the compound reducing the dusting tendency, an additive according to any one of the preceding claims 1-5 is added to the fiber pulp in an amount of 1.0 - 3.0 kg/t.

1/2

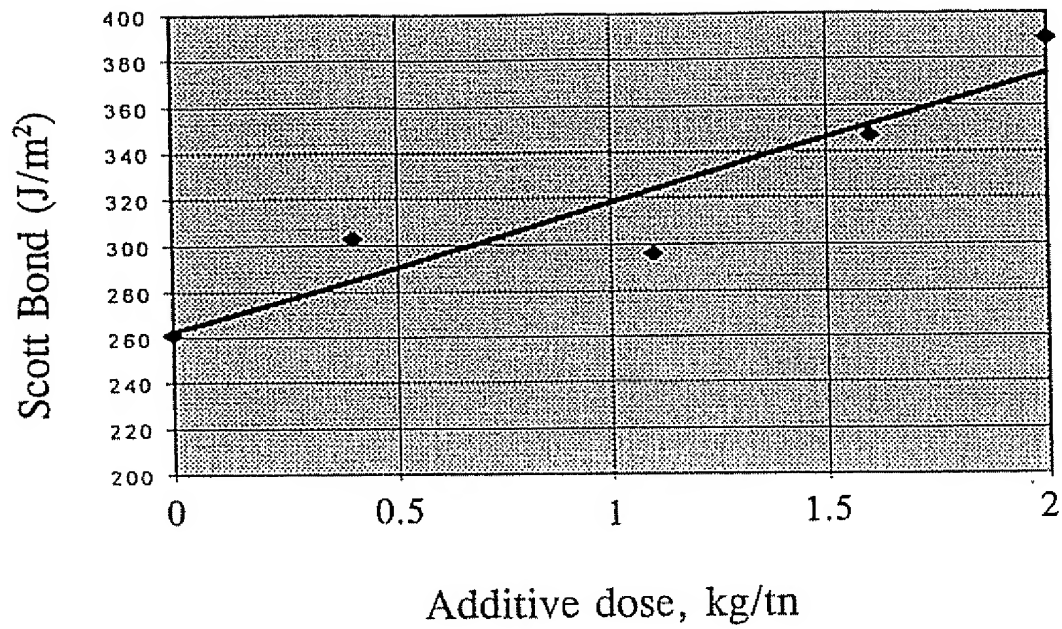


Fig. 1

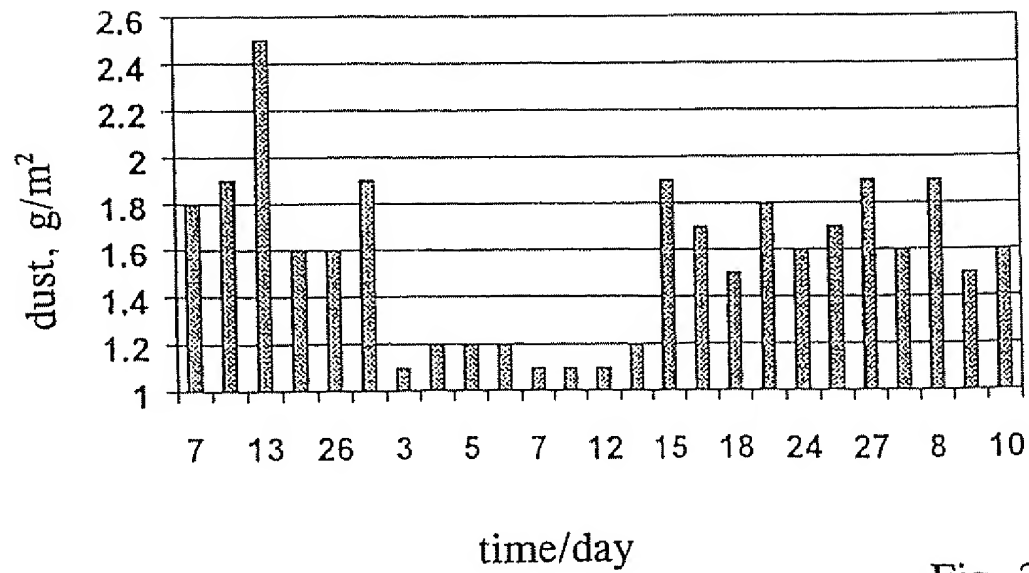


Fig. 2

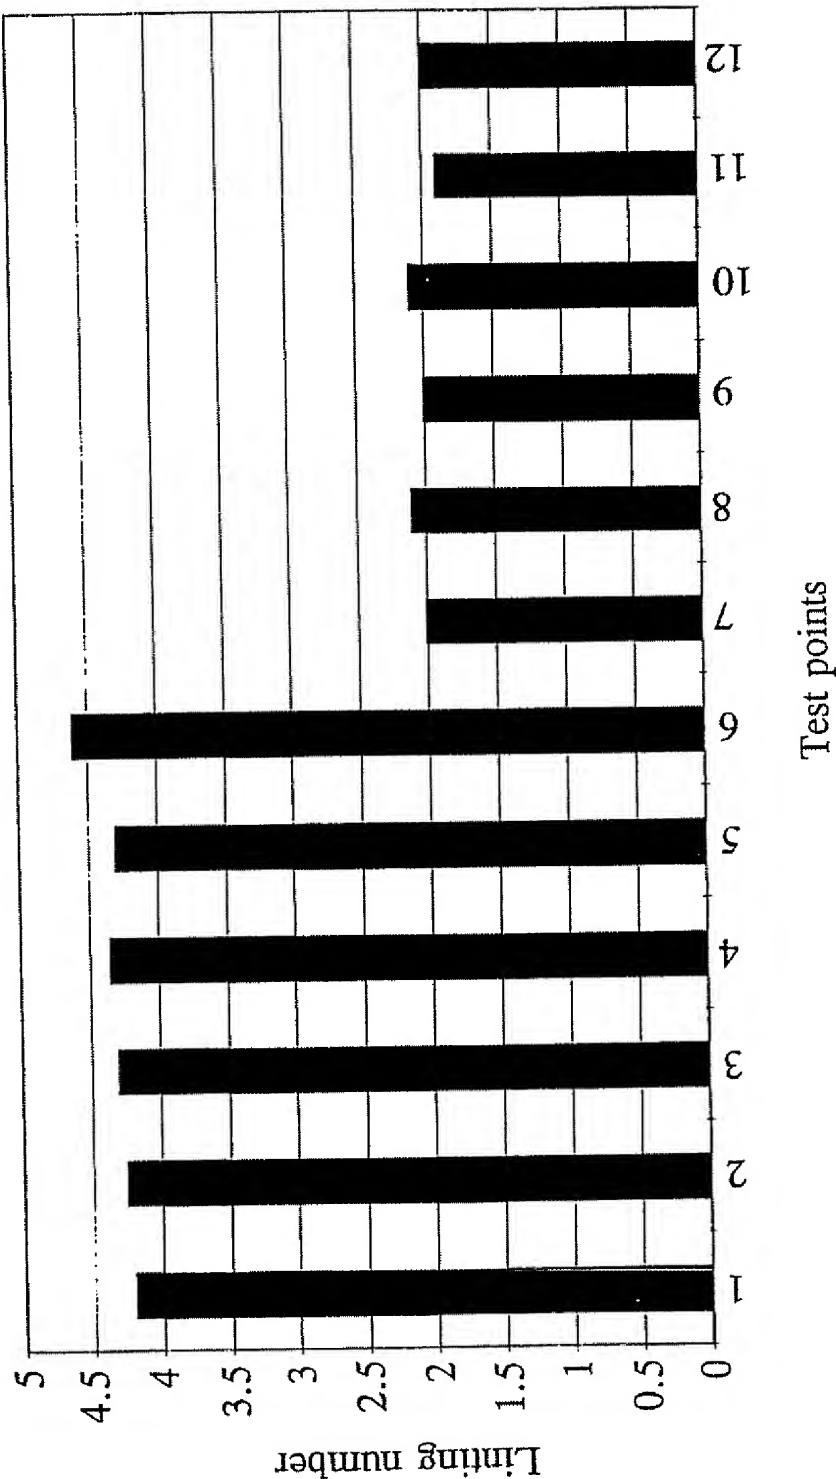


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI 99/00601

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: D21H 17/29, D21H 21/14
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9746591 A1 (GEORGE WESTON FOODS LIMITED), 11 December 1997 (11.12.97), the claims and page 4, lines 17-18 --	1-6
A	EP 0257338 A2 (NATIONAL STARCH AND CHEMICAL CORPORATION), 2 March 1988 (02.03.88) --	1-6
A	WO 9310305 A1 (RAISION TEHTAAT OY AB), 27 May 1993 (27.05.93) -- -----	1-6

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *B* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

& document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

10 November 1999

22 -11- 1999

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Solveig Gustavsson/EÖ
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

28/09/99

International application No.

PCT/FI 99/00601

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9746591 A1	11/12/97	AU 2758997 A AU P0017196 D	05/01/98 00/00/00
EP 0257338 A2	02/03/88	SE 0257338 T3 AT 78493 T CA 1284639 A DE 3780532 A FI 94765 B,C FI 873391 A US 4876336 A JP 1891916 C JP 4032081 B JP 63048301 A US 4964953 A	15/08/92 04/06/91 27/08/92 14/07/95 14/02/88 24/10/89 07/12/94 28/05/92 01/03/88 23/10/90
WO 9310305 A1	27/05/93	AT 157132 T DE 626022 T DE 69221735 D,T DK 626022 T EP 0626022 A,B SE 0626022 T3 ES 2106200 T FI 91428 B,C FI 915310 A US 5578169 A	15/09/97 11/09/97 26/03/98 23/03/98 30/11/94 01/11/97 15/03/94 12/05/93 26/11/96